
Toyota BB Converter wiring

Red =12v Black=GND

Loom side	Clock side
Yellow Can-H	Green Can-H
White Can-L	Blue Can-L

www.kbtv.co.uk

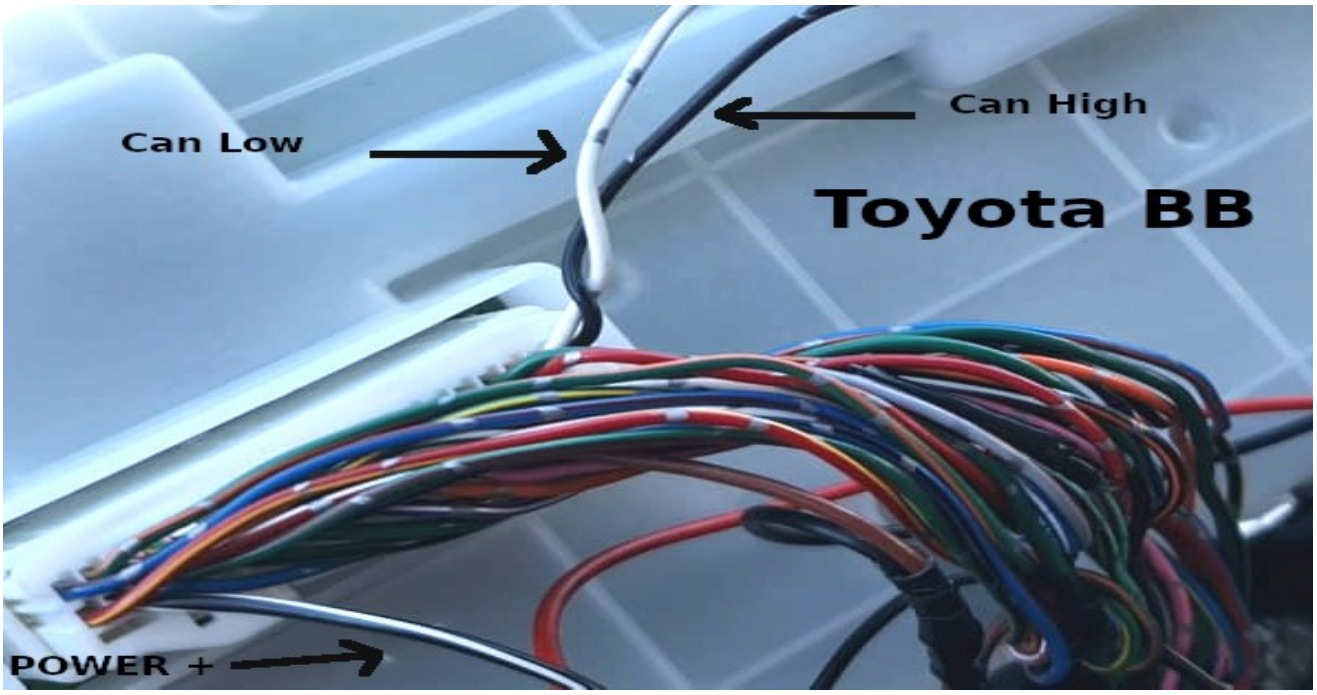

Vehicle wiring as in picture above

Black wire of vehicle = Can High

White wire of vehicle = Can Low

Cut wires on at a time approx 4 cm from plug and taking care not to let the wires short to anything

Loom side

Connect the Yellow wire of converter to the cut Black wire Loom side.
Connect the White wire of converter to the cut White wire Loom side.

Clock side

Connect the Green wire of converter to the cut Black wire Clock side.
Connect the Blue wire of converter to the cut White wire Clock side.

Connect Red wire off converter to 12 v and Black wire off converter to GND
For help call 07951178250