
Toyota Voxy /Noah 2017
Fitting Converter wiring

Vehicle wiring as in picture above

Sky Blue wire of vehicle = Can High

White wire of vehicle = Can Low

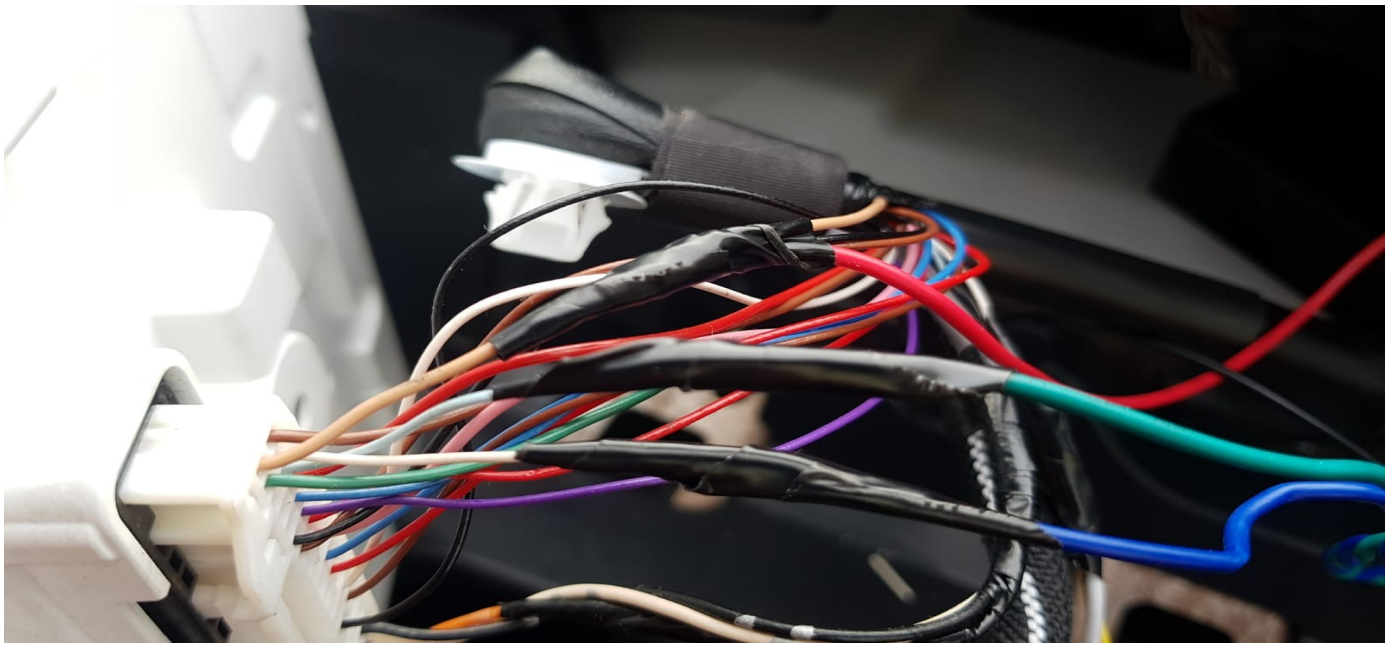

Find the Blue and white twisted pair.
Cut wires on at a time approx 4 cm from plug and taking care not to let the wires short to anything

Loom side

Connect the Yellow wire of converter to the cut Sky Blue wire Loom side (can high).
Connect the White wire of converter to the cut White wire Loom side Can low).

Clock side

Connect the Green wire of converter to the cut Sky Blue wire Clock side (can high).
Connect the Blue wire of converter to the cut White wire Clock side(can low).
Conect Red of converter to 12v
connect Black of converter to GND

If you need help / advice call 07951178250